

Opto Engine LLC

Data sheet

Rev. 0912

PGL-III-655/5~500mW

PORTABLE LASER AT 655nm




PGL-III-655 is made features of small size, driven by battery, special safety parts design.



SPECIFICATIONS

Wavelength (nm)	655±3
Output power (mW)	>5, 10, 15, 20, ..., 500
Transverse mode	TE ₀₀
Operating mode	CW
Beam divergence, full angle (mrad)	<5
Beam diameter at the aperture (mm)	6
Switch	Push button
Surface color	Black
Range in darkness (m)	1000~10000
Power supply	2×“C”size/1.5V batteries
Operating lifetime (hours)	5000~10000
Warranty	6 months
Remark	LED indicator, remote connector and key switch are available.

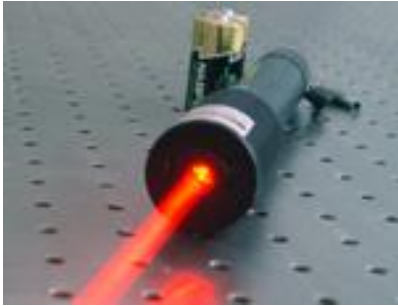

PGL-III-655	Dimensions	Accessory
 <p>Φ38×230(L) mm³, 0.3 kg</p>		 <p>2×“C”size/1.5V batteries</p>