


980nm HHL Package Fiber-Coupled CW Module

K98S09F-2.00W K98S09F-3.00W K98S09F-4.00W K98S09F-7.50W

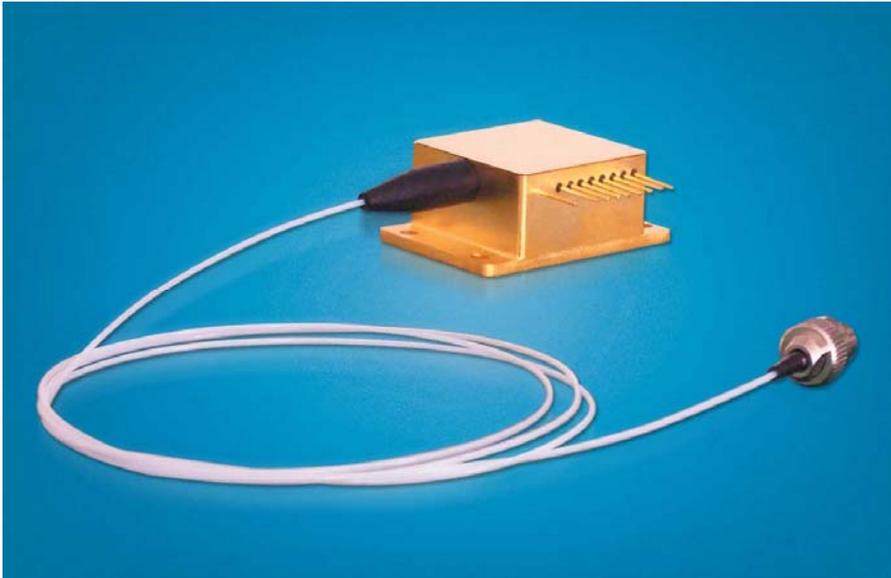

Key Features:

- ◆ 2-7.5W output power
- ◆ 100 μ m, 200 μ m or 400 μ m fiber core diameter
- ◆ 0.22NA
- ◆ 980nm wavelength

Applications:

- ◆ Laser pumping
- ◆ Medical use
- ◆ Printing
- ◆ Heating
- ◆ Material processing
- ◆ Marking

BWT Beijing's High Power Diode Laser Modules are manufactured by adopting specialized fiber-coupling techniques, resulting in volume products with a high efficiency, stability and superior beam quality. The products are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspecting and burn-in procedures in every aspect come to a result to guarantee each product with the reliability, stability and long lifetime.

Our research staffs are constantly improving and innovating the processing technology in the producing process, based on the professional knowledge and experience accumulated in long-terms. We are also continuously developing new products to meet customers' specific needs.

At BWT Beijing, to provide high quality products with reasonable price is our always goal.

980nm HHL Package Fiber-Coupled CW Module

K98S09F-2.00W K98S09F-3.00W K98S09F-4.00W K98S09F-7.50W

| Specifications (25°C) | | Symbol | Unit | K98S09F-2.00W | K98S09F-3.00W | K98S09F-4.00W | K98S09F-7.50W |
|------------------------------|---|-----------------|-------------------------------|-----------------------------|---------------|---------------|---------------|
| Optical data | CW-output power | P_o | W | 2 | 3 | 4 | 7.5 |
| | Center wavelength | λ_c | nm | 980 | | | |
| | Tolerance of λ | - | nm | $\pm 3, \pm 5, \pm 10$ | | | |
| | Spectral width (FWHM) | $\Delta\lambda$ | nm | <3 | | | |
| | Temperature drift of λ | - | nm/°C | ~0.3 | | | |
| Fiber data ¹ | Fiber core diameter | W_c | μm | 100/200 | 100/200 | 100/200 | 200/400 |
| | Numerical aperture | NA | - | 0.22 | | | |
| | Fiber connector | - | - | FC, ST, SMA-905 | | | |
| Electrical data | Operation current | I_{op} | A | 3.0 | 4.5 | 5.5 | 11.0 |
| | Threshold current | I_{th} | A | 0.3 | 0.5 | 0.5 | 1.2 |
| | Conversion efficiency ² | η | % | 35~45 | | | |
| | Slope efficiency ³ | η_D | W/A | 0.7~1.0 | | | |
| | Operation voltage | V_{op} | V | 1.6 | 1.8 | 1.9 | 2.0 |
| | Reverse voltage | V_{re} | V | 2 | | | |
| PD data | Current | I_{mo} | mA | 0.20~1.50 | | | |
| TEC data | Max. current | I_t | A | 4.0 | 4.0 | 4.0 | 6.0 |
| | Max. voltage | V_t | V | 9.8 | | | |
| Thermistor data ⁴ | Thermistor | R_t | (K Ω)/ β (25°C) | 10 \pm 5%/3477 | | | |
| Other specifications | Operation temperature | T_{op} | °C | 10~30 | | | |
| | Storage temperature | T_{st} | °C | -20~80 | | | |
| | Expected lifetime | MTBF | h | >10,000 | | | |
| | Dimensions (fiber and connector not included) | - | mm | ~45 \times 32 \times 16 | | | |
| | Weight | - | g | ~70 | | | |
| | Lead soldering temperature | T_{is} | °C | 260(10 sec.) | | | |

1. Other fibers available for OEM applications. Contact BWT Beijing.

2. $\eta = P_o / (I_{op} V_{op})$.


3. $\eta_D = P_o / (I_{op} - I_{th})$.

4. $R_t = R_0 \cdot \exp(\beta(1/T - 1/T_0))$, ($T_0 = 25^\circ\text{C} = 298\text{K}$).

980nm HHL Package Fiber-Coupled CW Module

K98S09F-2.00W K98S09F-3.00W K98S09F-4.00W K98S09F-7.50W


LD Characteristics

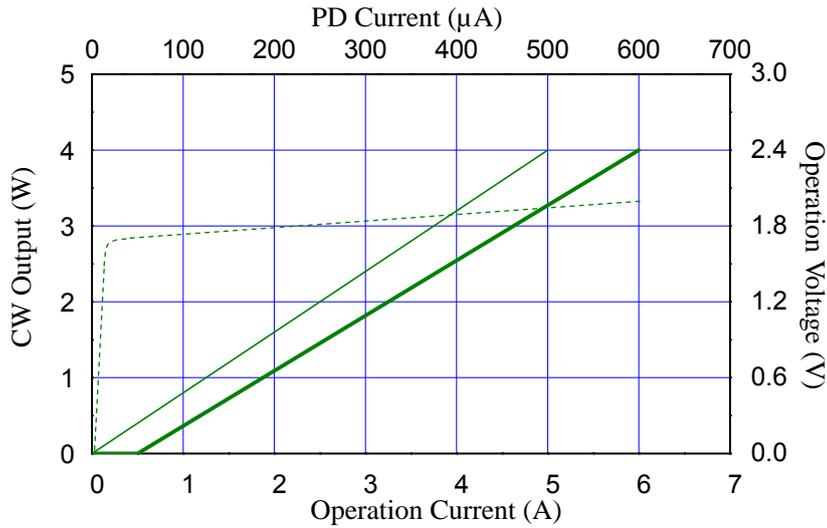

- Light vs. Current Characteristics
- PD Current vs. Light Characteristics
- - - Voltage vs. Current Characteristics

Typ. spectrum (T=25°C)


Typ. spectrum of 980nm diode laser modules

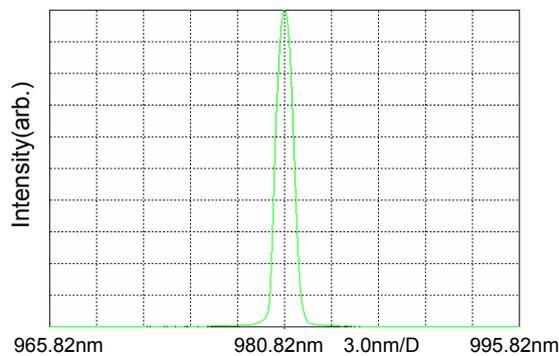

980nm HHL Package Fiber-Coupled CW Module

K98S09F-2.00W K98S09F-3.00W K98S09F-4.00W K98S09F-7.50W

Package Dimensions (mm)

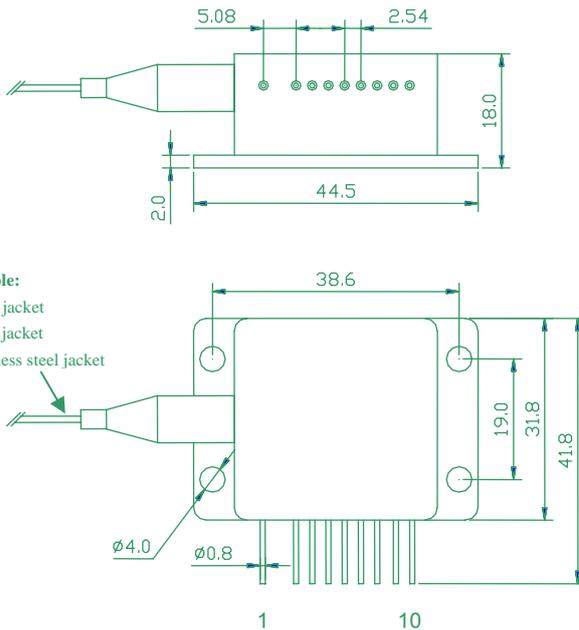

Customer Selectable:

- 900 μ m PVC jacket
- 3.0mm PVC jacket
- 2.1mm stainless steel jacket

| Pin | Function | Pin | Function |
|-----|-----------------|-----|-------------------|
| 1 | TEC (-) | 6 | Thermistor(2) |
| 2 | None | 7 | Laser Cathode (-) |
| 3 | Case | 8 | PD (P) |
| 4 | Laser Anode (+) | 9 | PD (N) |
| 5 | Thermistor(1) | 10 | TEC (+) |

OPERATING NOTES

- Avoid eye exposure to direct or scattered radiation when the device is in operation.
- ESD precautions must be taken when handling unit.
- Using constant power supplies to guarantee the component works under the limits of its maximum peak optical power.
- The laser diode must be used under the specifications.
- Unit requires a condition to spread the heat as well as possible.
- Keep the fiber end clean before use. Fiber is not allowed to be curved so much. The diameter of curvature should be 300 times greater than fiber diameter.
- Environment temperature is 10 $^{\circ}$ C--30 $^{\circ}$ C.
- Storage temperature is -20 $^{\circ}$ C--80 $^{\circ}$ C, short circuit store.



VISIBLE AND/OR INVISIBLE LASER RADIATION
 AVOIDS EYE OR SKIN EXPOSURE TO DIRECTOR
 SCATTERED RADIATION
 MAXIMUM OUTPUT IS DEPENDANT UPON AND LESS THAN
 INPUT RADIATION EMITTED WAVELENGTH DEPENDS UPON
 FILTER SETTING CLASS IV LASER PRODUCT



Information and specifications contained herein are deemed to be reliable and accurate. BWT Beijing reserves the right to change, alter or modify the design and specifications of these products at any time with out notice.